

NEW

FRONT LOADERS X4



McCORMICK



	Front loaders		
	MC'55	MC'60	MS'60
Tractor Power* (HP)	50-80	50-80	50-80
A - Lift height tool axis* (m)	3,45	3,45	3,45
Lifting capacity on pallet stacker:			
On the ground (kg) ⁽¹⁾	1300	1770	1410
At 2m00 (kg) ⁽¹⁾	1300	1240	990
At maximum height (kg) ⁽¹⁾	1200	1000	800
B - Excavation angle on the ground*	45°	44°	44°
C - Discharge angle at max. height*	57°	57,5°	57,5°
Lift cylinders (DE - ø mm)	Ø60	Ø65	Ø65
Time of lifting ⁽²⁾ - at maximum height - (s)	5,2	5,3	5,3
Mechanical self-levelling	Standard	Standard	No
Euro implement holder	Standard	Standard	Standard
Arm width (mm)	1020	1020	1020
Sub-frame	MM	MM	MM
Pre-equipped implement attachment for Manip'Pic	Option	Option	Option
Arm weight without option (kg)	380	430	430

* May vary depending on the type of tractor equipped
⁽¹⁾ Control pressure at 180 bars at 60 l/mn at 900 mm in front of the pivot point.


⁽²⁾ L'1° = 40

Note : These features may vary depending on the type of tractor equipped.

Equipments

Equipments	MC' / MS'
Direct hydraulic connection to tractor valves (2DE)	○
MANIP monolever with 2DE (cables)	○
3 rd function	○
4 th function	○
MANIP'Activ suspension	○
Loader Multicoupler - MANIP' Fast	○
Utility kit (Only for MS'/MC'60)	○

● Standard / ○ Option

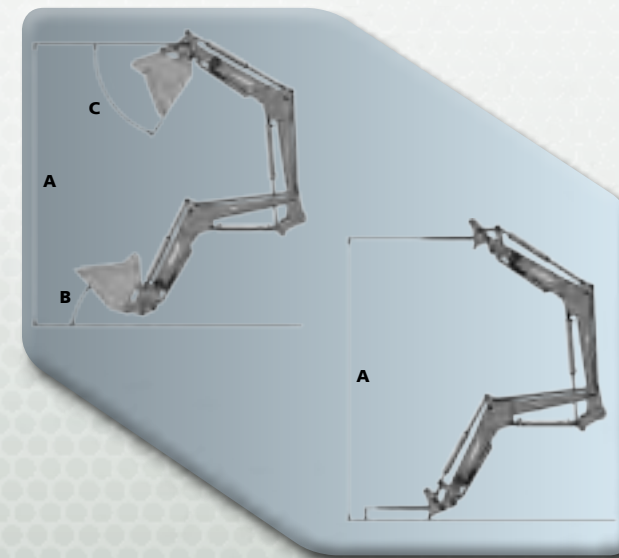

Notes: